IMPORTANT SAFETY INSTRUCTIONS

The applied nameplate is located at the bottom of the baby unit's base When using your equipment, basic safety precautions should always be followed to reduce the risk of fire.

electric shock and injury, including the following: 1. Follow all warnings and instructions marked on the

- Adult setup is required
- 3. CAUTION: Do not install the baby unit at a height above 2 metres.
- 4. This product is intended as an aid. It is not a substitute for responsible and proper adult supervision and should not be used as such
- 5. This product is not intended for use as a medical
- 6. Do not use this product near water, for example, near to a bath, sink, swimming pool or shower.
- 7. CAUTION: Use only the battery provided. There may be a risk of explosion if a wrong type of battery is used for the parent unit. The battery cannot be subjected to high or low extreme temperature and low air pressure at high altitude during use, storage or transportation. Disposal of battery in fire or a hot oven, mechanically crushing or cutting the battery can result in an explosion. Leaving the battery in an extremely high temperature surrounding environment can result in an explosion or the leakage of flammable liquid of gas. Battery subjected to extremely low air pressure may result in an explosion or the leakage of flammable liquid or gas. Dispose of used batteries according to the instructions
- 8. Use only the power adaptors included with this product. Incorrect power adaptor polarity or voltage can seriously damage the product.

A Di Power adaptor information: Parent unit output: 5V DC 1A VTech Telecommunications Ltd Model: VT05EUK05100

Baby unit output: 5V DC 600mA. VTech Telecommunications Ltd. Model: VT05EUK05060


Zhuhai Great Power Energy Co., Ltd. Li-ion battery, 3.6V, 2600mAh, 9.36Wh;

- Model: ICR18650-2.6Ah-3.6V-1S1P 9. The power adaptors are intended to be correctly oriented in a vertical or floor mount position. The
- prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-the-table or cabinet
- 10. For pluggable equipment, the socket-outlet should be installed near the equipment and should be easily accessible.
- 11. Unplug this product from the wall outlet before cleaning. Do not use liquid or aerosol cleaners. Use a damp cloth for cleaning.
- 12. Do not modify the power adaptors or replace with other adaptors, as this causes a hazardous situation. 13. Do not allow anything to rest on the power cords.
- Do not install this product where the cords may be walked on or crimped. 14. This product should be operated only from the type
- of power source indicated on the marking label. If you are not sure of the type of power supply in your home, consult your dealer or electricity supply provider.
- 15. Do not overload wall outlets or use an extension cord. 16. Do not place this product on an unstable table, shelf, stand or other unstable surfaces

17. This product should not be placed in any area where proper ventilation is not provided. Slots and openings in the back or bottom of this product are provided for ventilation. To protect them from overheating, these openings must not be blocked by placing the product on a soft surface such as a bed, sofa or rug. This product should never be placed near or over a

- radiator or heat source. 18. Never push objects of any kind into this product through the slots because they may touch dangerous oltage points or create a short circuit. Never spill liquid of any kind on the product.
- 19. To reduce the risk of electric shock, do not disassemble this product, but take it to an authorised service facility. Disassembling or removing parts of the product other than via the battery door may expose you to dangerous voltages or other risks. Incorrect reassembling can cause electric shock when the product is subsequently used.
- 20. You should test the sound reception every time you turn on the units or move one of the components . Periodically examine all components for damage.
- There is a very low risk of privacy loss when using certain electronic devices, such as baby monitors cordless telephones, etc. To protect your privacy make sure the product has never been used before purchase, reset the baby monitor periodically by powering off and then powering on the units, and power off the baby monitor if you are not intending o use it for some time
- 23. The small parts of this monitor can be swallowed by babies or small children. Keep these parts out of reach of children. 24. Children should be supervised to ensure that they do
- not play with the product.
- 25. The product is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervisior or instruction concerning use of the appliance by a person responsible for their safety. SAVE THESE INSTRUCTIONS

- Use and store the product at a temperature between 0°C and 40°C. Do not expose the product to extreme cold, heat
- or direct sunlight. Do not put the product close to a heating source. Batteries should not be exposed to excessive heat
- such as bright sunshine or fire. Mishandling batteries can cause burn, fire or
- osion hazards. Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 0.9m away). Do not



Other electronic products may cause interference with your baby monitor. Try installing your baby monitor as far away from these electronic devices as possible: wireless routers, radios, cellular elephones, intercoms, room monitors, televisions personal computers, kitchen appliances and ordless telephones.

VM3258 2.8" Video Monitor with Night Light



vtech Quick start guide



eviton tuoditiw egnedo ot toejdus are srioiteoitio

The Stream Noise sound file was created by Caroline Ford, and is used under the Creative Commons license. The Background Noise sound file was created by Caroline Ford, and is used under the Creative Commons license.

Parent unit: 3.6V, Adm006Z (Vall Li-ion, 9.36Wh Li-ion battery Am006 @ JD V2 (Putpuc) و Am006 Am00 Miny yde8 AI @ JD V2 (Putpuc) ما Among tinu tn9169 Am
Actual operating range may vary according to environmental conditions at the transition of use.
2.8" Colour LCD (QVGA 320x240 pixel)
32
zHM 2745 - 2045 - 2045 Parent :: 2405 - 2475 MLz
Crystal controlled PLL synthesizer

TECHNICAL SPECIFICATIONS

Basic Operation - Parent Unit

Use the menu

₹\$

Press **MENU** to enter the menu, or save a setting. You can use the parent unit for advanced settings or operations, such as to play or stop the baby unit lullaby, or to adjust the baby unit's sound sensitivity.

Main menu


While in the menu:

- Press ◀ or ► to scroll among the menu options.
- Press ▲ or ▼ to select an item. • Press SELECT to confirm your
- selection.
- Press TALK/EXIT to exit the menu and return to live view

Talk to your baby unit

 $\mathcal{V}_{\mathcal{O}}$


Press and hold TALK and speak to your Darent unit. Your voice is transmitted to the baby unit. When finished talking, release the **TALK** key to hear your baby again.




Turn off the screen

Press **POWER/LCD OFF** to switch off the screen. You can still hear sound from the selected baby unit.

MENU SELECT



尜Tip • Press any key on the parent unit to turn the screen on again.



Press ▲ VOL+ / ▼ VOL- to adjust your

parent unit speaker volume.

Adjust parent unit speaker volume

- 1. Press MENU when in idle mode.
- 2. Choose 🔑.

Zoom

3. Press ▲ or ▼ to choose ^{2X} (Zoom in) or (Zoom out), then press **SELECT** to confirm your selection.





OVERVIEW - PARENT UNIT (<u>i</u>)


/ vtech


- Antenna Battery LED light 3-level sound indicator light
- Arrow keys
- ▲ VOL+ / ▼ VOL-
- MENU/SELECT
- LINK LED light
- On when the parent unit is linked to the
- baby unit. • Flashes when the link to the baby unit is lost.
- TALK/EXIT
- <u>Press and hold</u> to talk to the baby unit. • While in a submenu, press to exit.
- POWER/LCD OFF
- 8 Microphone
- Power jack 11
- RESET • Force reboot the parent unit.



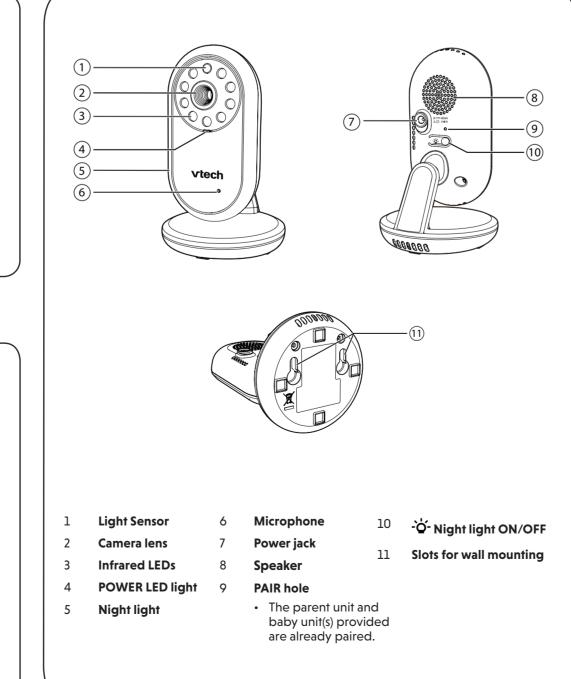


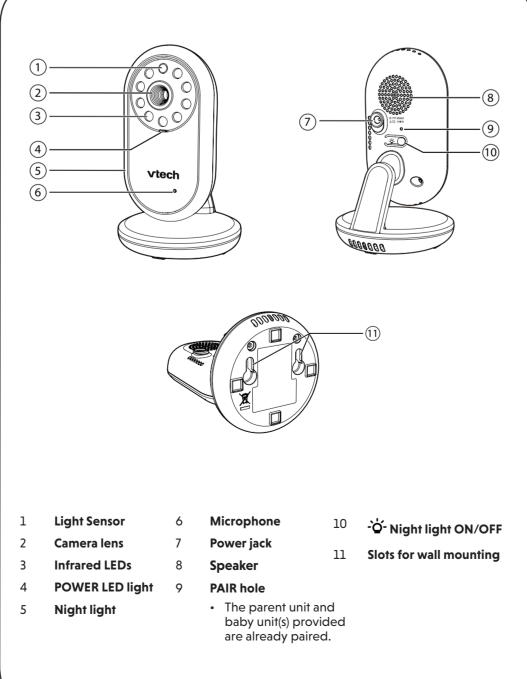

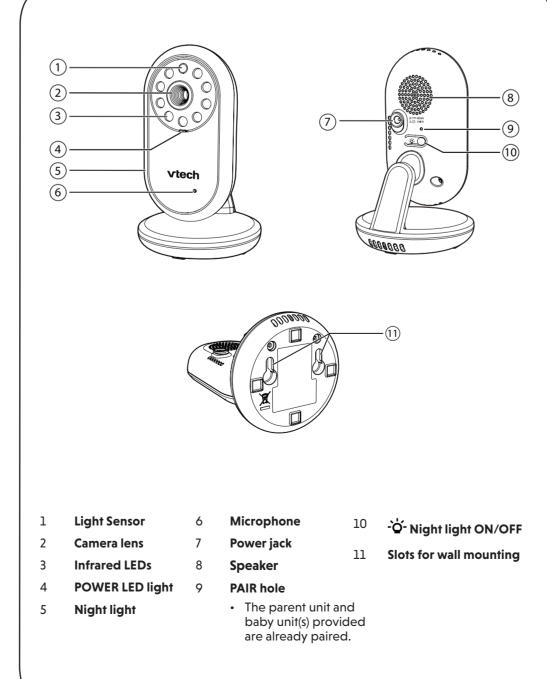

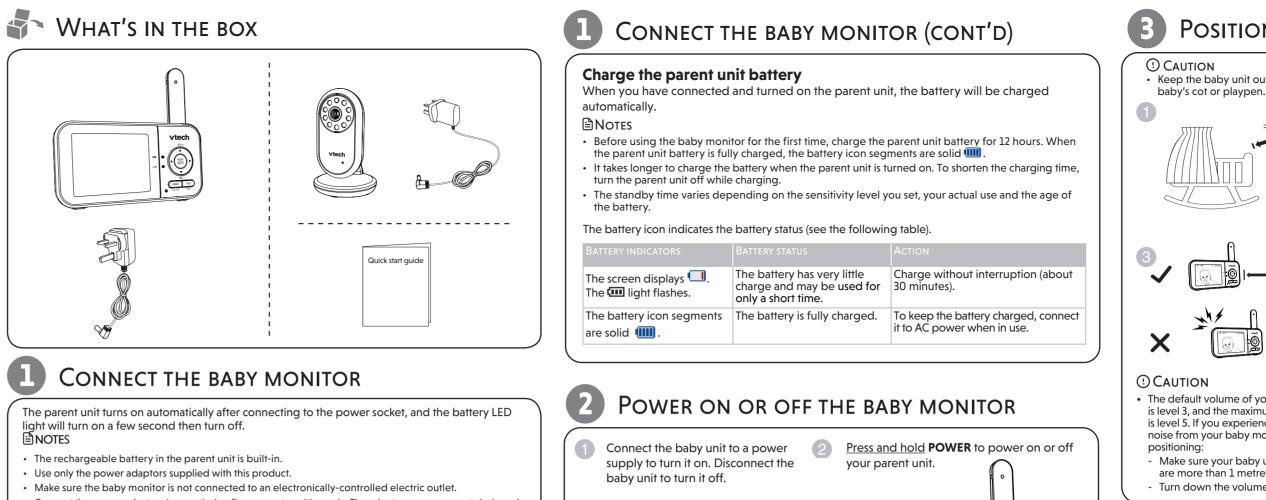

- Connect the power adaptors in a vertical or floor mount position only. The adaptor prongs are not designed to hold the weight of a baby monitor, so do not connect them to any ceiling, under-the-table, or cabinet outlets. Otherwise, the adaptors may not properly connect to the outlets.
- Make sure the parent unit, the baby units and the power adaptor cords are out of reach of children

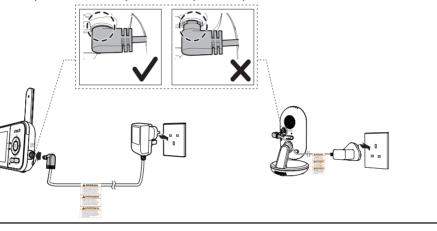

Overview - Baby unit

PARENT UNIT ICONS

Status icons		Main menu icons	
Yuli	Connection status	Main Sub-menu	
	 Yull or Yul displays when strong signal strength is detected between the baby unit and the parent unit. Yul or Yu displays when moderate or low signal strength is detected between the baby unit and the parent unit. 	menu Volume ∎∭	Parent uni Adjust th
ø	ZoomDisplays when the current image on the parent unit has zoomed in.	Settings	speaker
*)	 Night vision Displays when the baby unit being viewed has activated the night vision feature. 	Ö =	OFF 55 6 Screen off • The pare
Q	TalkbackDisplays when talking back to the baby unit from parent unit.		turn off a time to sa still hear screen is
1	LullabyDisplays when a lullaby is playing.		VOX (Voic Sensitivity
ġ.	Night lightDisplays when the baby unit's night light is turned on.		• When VC the parer automation
۹x	 Mute alert Displays when the parent unit speaker volume is set to zero. Displays when the parent unit is talking to the baby unit. 		detected a set leve the baby sensitivity higher th
°F or °C	 Real-time temperature Displays the real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. 57 °F or 14 °C). 		the more unit is in o for transr unit. For o
	 Battery status ▷ □ > □ > □ > □ animates when the battery is charging. □ displays solid when the battery is fully charged. □ displays when the battery is low and needs charging. 		Sound se activation • The pare off again the sound than the s NOTE • When the is off, if ale example, r between t baby unit, parent uni

POSITIONING THE BABY MONITOR

• Keep the baby unit out of the reach of your baby. Never place or mount the baby unit inside the





Make sure your baby unit and parent unit are more than 1 metre apart, OR Turn down the volume of your parent unit.

■NOTE

To avoid interference from other electronic devices place your baby monitor at least 1 metre away from devices such as wireless routers, microwaves, mobile phones and computers.

4 STATUS CHECK


unit, your parent unit


LED light turns on.

light turns on.


POWER

Press and hole

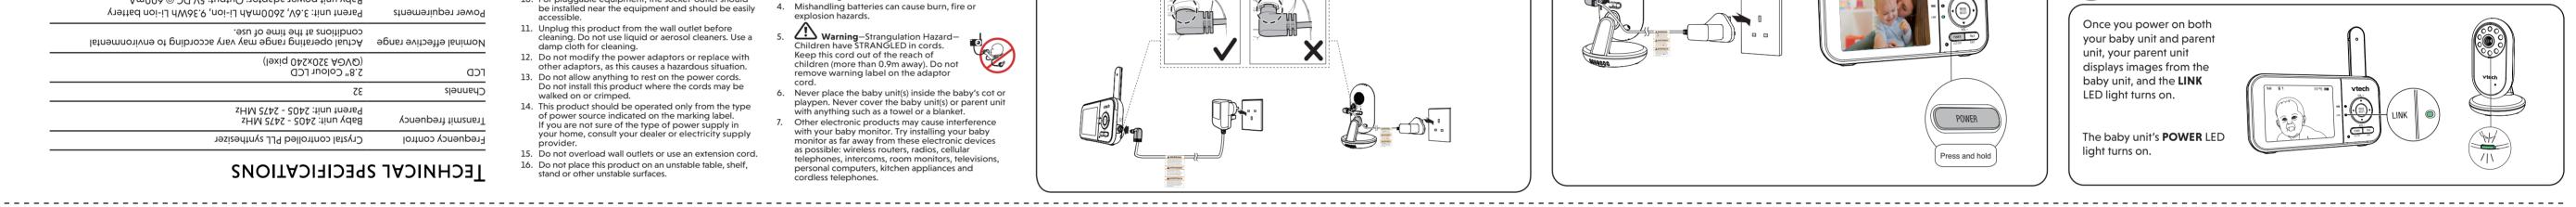

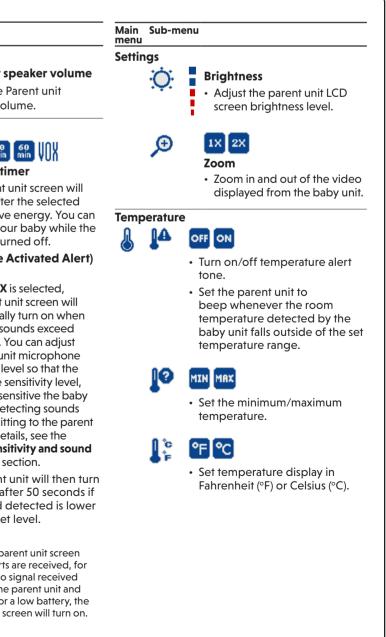

PARENT UNIT ICONS (CONT'D)

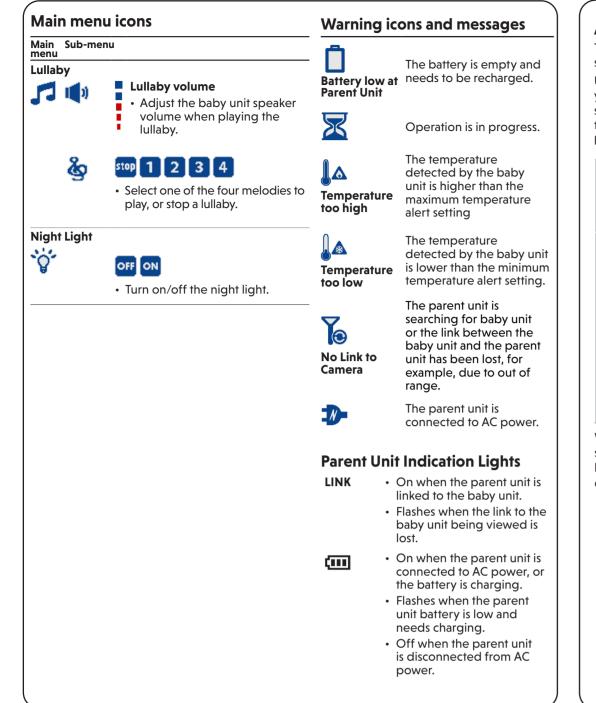

CUSTOMER SERVICE AND PRODUCT WARRANTY

PRODUCT WARRANTY

- YEAR hank you for choosing this quality product from VTech
- The product detailed above is covered by a one year warranty from the date of purchase against any defects in materials or workmanship.
- 2. The product may be returned to the place of purchase. Alternatively the product can be returned to VTech Electronics Europe Plc (see address below), with proof of purchase, without proof of purchase no replacement will be provided.
- 3. VTech Electronics Europe Plc will examine the product and if it is found to be defective due to faulty materials or workmanship, will replace the product at their discretion.
- 4. If the product covered by this warranty is damaged due to misuse, modification or unauthorized repair, or because of faulty batteries, battery discharge or incorrect electrical connections, then this warranty becomes void. . This warranty is personal to the original purchaser and is not transferable.
- Breakages to the LCD screen are not covered by the warranty.
- Products returned to VTech Electronics Europe Plc, should be sent to the address showr below and packed carefully to avoid damage in transit. Please do not include batteries or adaptors. Please include details of the fault together with your name and address, contact phone number and/or email address.
- B. To keep an online record of your warranty, please register your product online at

/Tech Electronics Europe Plc, c/o XPO Logistics, Warehouse 350, Cat & Fiddle Lane,

est Hallam. DE7 6HE THIS WARRANTY IS OFFERED AS AN EXTRA BENEFIT AND DOES NOT AFFECT CONSUMERS' STATUTORY RIGHTS.

This warranty is valid for the UK and Ireland only. For products purchased outside he UK and Ireland, please contact your local distributor or place of purchase.

IMPORTANT

΄ ΟΝΕ

Please retain this booklet with your sales receipt as proof of the date of purchase. **Customer Service**

Please visit www.vtechphones.eu to contact our Customer Service Department.

Sound sensitivity and sound activation

60 min

30

5 🗆


OFF 🗩

Adjust the sound sensitivity of the baby unit The parent unit screen will turn on only when the detected sounds exceed a set level.

Use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit is in detecting sounds that transmit to the parent unit. The VOX sensitivity level is preset to the ahest level

o the parent unit. The VOX sensitivity level is preset to the ighest level.									
VOX Sensitivity level	Highest	High	Medium	Low	Lowest				
DESCRIPTION	The parent unit screen turns on for quiet sounds, (including background noises) from your baby's room.	The parent unit screen turns on for soft babbling and louder sounds from your baby. It remains off when your baby sleeps soundly.	The parent unit screen turns on for loud babbling and louder sounds from your baby. It remains off when your baby makes soft sounds.	The parent unit screen turns on for crying and louder sounds from your baby. It remains off when your baby makes soft sounds.	The parent unit screen turns on for loud crying or screeching sounds from your baby. It remains off when your baby makes soft sounds.				

When **VOX is** selected, the parent unit screen stays off to save power when the baby unit detects sounds that are lower than the set sensitivity level. Once the baby unit detects sounds that are louder than the set sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds if the sounds detected are lower than the set sensitivity level.

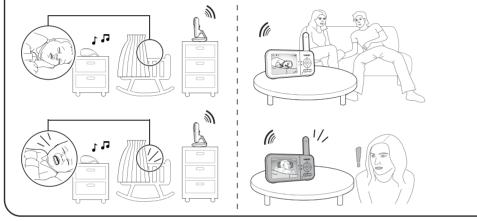

DISPOSAL OF BATTERIES AND PRODUCT



The crossed-out wheelie bin symbols on products and batteries, or on their respective packaging indicates they must not be disposed of in domestic waste as they contain substances that can be damaging to the environment and human health.

The chemical symbols Hg, Cd or Pb, where marked, indicate that the battery contains more than the specified value of mercury (Hg), cadmium (Cd) or lead (Pn) set out in Battery Directive (2006/66/EC). The solid bar indicates that the product was placed on the market after 13th August, 2005.

Help protect the environment by disposing of your product or batteries responsibly.

DECLARATION OF CONFORMITY

This product is intended for use within Europe and UK.

This equipment complies with the essential requirements to EU's Radio Equipment Directive (2014/53/EU) and the UK's Radio Regulations 2017 on radio systems and telecommunication equipment.

VTech Telecommunications Ltd. hereby declares that this Video Baby Monitor VM3258 is in compliance with the essential requirements and other relevant provisions of EU's Radio Equipment Directive (2014/53/EU) and UK's Radio Equipment Regulations 2017. The Declaration of Conformity for the VM3258 is available from www.vtechphones.eu


Manufacturer: VTech Telecommunications Ltd. 23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.

Importer: VTech Electronics Europe Plc. Napier Court, Abingdon Science Park, Abingdon, Oxon, OX14 3YT.



UK

CA










- fluorescent lamps).

DIM MODE

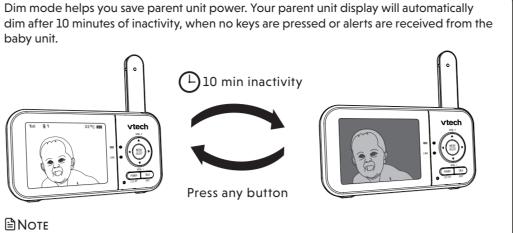

• When the screen is dimmed, any keypress or alert message will trigger the screen to return to the preset brightness level. After 10 minutes of inactivity, it will resume back to dim mode.

NIGHT VISION

The baby unit has infrared LEDs that allow you to see your baby clearly at night or in a dark room. When the baby unit detects low light levels, the infrared LEDs are switched on automatically. The images from the baby unit are in black and white, and 🧿 appears on the

- It is normal to see a short white glare on your parent unit screen when the baby unit adapts to the dark environment.
- When the infrared LEDs are on, the mages are in black and white. This is
- ※ TIP
- Depending on the surroundings and other interfering factors, for example, lighting, objects, colours and backgrounds, the image quality may vary. Adjust the baby unit angle or place the baby unit at a higher location to prevent glare and a blurred display.



Insert the screws into the holes and

Align the wall mount holes on the

Adjust the camera angle.

into place.

baby unit with the screws on the wall

Slide the baby unit down until it locks

the screws are exposed.

tighten the screws until only 6.5 mm of

Not Included

2 screws

NOTE

a

NOTE

2

You will need to purchase the following

items separately to mount your baby unit:

, Star

The types of screws and wall plugs you need

depend on the composition of the wall.

Check for reception strength and camera

Use a pencil to mark two holes in parallel.

as the wall mount holes on the baby unit.

Make sure they are the same distance apart

Drill two holes in the wall (5.5 mm drill bit). If

If you drill the holes into an object other than

gently on the ends with a hammer until the

wall plugs are flush with the wall.

a stud, insert the wall plugs into the holes. Tap

you drill the holes into a stud, go to step 3.

angle before drilling the holes.

2 wall plugs

Why does the baby monitor not respond normally?	Try th 1. Dis 2. Wa 3. Tur 4. Wa for
Why doesn't the baby unit and parent unit power-on light illuminate when the units	Perha the p switc Perha
are switched on?	baby parer
Why doesn't my parent	Make
unit charge while connected to AC power?	The b repai
Why is my screen in black and white?	The s visior
Why do I get glare or blurry display on my screen when viewing my baby at night?	Durin like li paren preve
Why does the baby monitor produce a feedback noise?	The p • Mo • Tur
Why does the parent unit beep?	The b not le
	The p Charg
	The t
Why does the parent unit react too quickly to other sounds?	The k sensi
Why don't I hear a sound/Why can't I hear my baby cry?	The p volur
Why can't I establish a connection? Why is the	The b not le
connection lost every now and then? Why are there sound interruptions?	Othe baby possi

SENERAL PRODUCT CARE

To keep this product working well and looking good, follow these guidelines:

Avoid placing it near heating appliances and devices that generate electrical noise (for example, motors or

- DO NOT expose it to direct sunlight or moisture.
- Avoid dropping the product or treating it roughly.
- Clean with a soft damp cloth.
- DO NOT immerse the parent unit and the baby unit in water and do not clean them under running water.
- DO NOT use cleaning spray or liquid cleaners.
- Make sure the baby unit and parent unit are dry before you connect them to the mains again.

Storage

When you are not going to use the baby monitor for some time, store the parent unit, the baby unit and the adaptors in a cool, dry place.

Adult supervision

• This baby monitor should be for use by adults only.

• Do not place the baby unit inside the cot or playpen.

• To ensure your children's safety, do not allow them to touch or play with the baby monitor and its accessories. THIS IS NOT A TOY.

Below are the questions most frequently asked about the baby monitor

he following (in the order listed) for common cure:

sconnect the power to the baby unit and the parent unit.

/ait a few seconds before connecting power back to the baby unit and the parent unit.

Irn on the baby unit and the parent unit.

/ait for the parent unit to synchronise with the baby unit. Allow up to one minute r this to take place.

aps the parent unit is not connected to the power. Insert the adaptor plug into parent unit and insert the adaptor in a wall socket. Then, press and hold POWER to h on the parent unit to establish connection with the baby unit.

aps the baby unit is not connected to the power. Insert the adaptor plug into the unit and insert the adaptor in a wall socket. Then, establish a connection with the nt unit.

e sure the power is not controlled by an electronically controlled wall switch. pattery may de degraded through extended use or defective. See Warranty for r/replacement.

creen is in black and white during night-time or in a dark room when the night n feature is activated. This is normal.

ng night-time or in a dark room, the surroundings and other interfering factors, ghting, objects, colours and backgrounds may affect the image quality on your ent unit screen. Adjust the baby unit angle or place the baby unit at a higher level to ent glare and a blurry display.

parent unit and baby unit may be too close to each other. ove the parent unit away from the baby unit until the noise stops; OR

rn down the volume of your parent unit.

baby unit may be out of range. Move the parent unit closer to the baby unit (but ess than 1 metre).

parent unit may not have enough charge for the parent unit to perform normally rge the battery in the parent unit until the battery icon segments are solid $\, {fullemmum}\, {f u}$. emperature of your baby's room may be too high or too low.

baby unit also picks up other sounds than those of your baby. Adjust the VOX tivity level to a lower level or lower the parent unit speaker volume.

parent unit speaker volume may be too low. See Adjust parent unit speaker me to increase the volume

baby unit may be out of range. Move the parent unit closer to the baby unit (but ess than 1 metre).

r electronic products and wireless products may cause interference with your monitor. Try installing your baby monitor as far away from these devices as